

## Sizes of OEM Nail Stickers

### Sticker Sizes

### Backing Paper Sizes

- ① Width of 68mm x height of 68mm → 68mm x 100mm

---

- ② Width of 88mm x height of 55mm → 88mm x 55mm

---

- ③ Width of 78mm x height of 97mm → 78mm x 120mm


---

- ④ Width of 88mm x height of 120mm → 88mm x 150mm

Note 1: The backing paper for ①, ③, and ④ is longer than the sticker. (It has an extra portion at the top.)  
 The backing paper for ② is the same size as the sticker.  
 Note 2: Printing on one side/both sides and in color/monochrome is possible.  
 Note 3: Choosing a backing paper and sleeve for ①, ③, and ④ with a hole or without a hole is possible.


①

- Sticker width of 68mm x height of 68mm
- Backing paper width of 68mm x height of 100mm (with hole/without hole)
- With sleeve with seal (with hole/without hole)

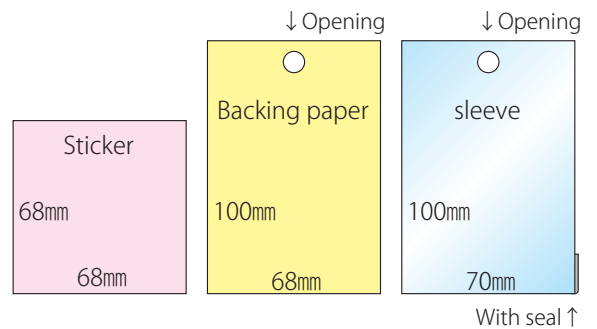

②


- Sticker width of 88mm x height of 55mm
- Backing paper width of 88mm x height of 55mm (without hole)
- With sleeve without seal (without hole)

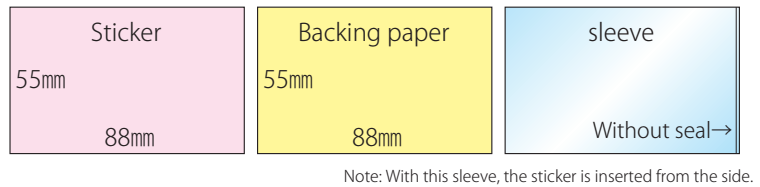

Note: With this sleeve, the sticker is inserted from the side.


③

- Sticker width of 78mm x height of 97mm
- Backing paper width of 78mm x height of 120mm (with hole/without hole)
- With sleeve with seal (with hole/without hole)

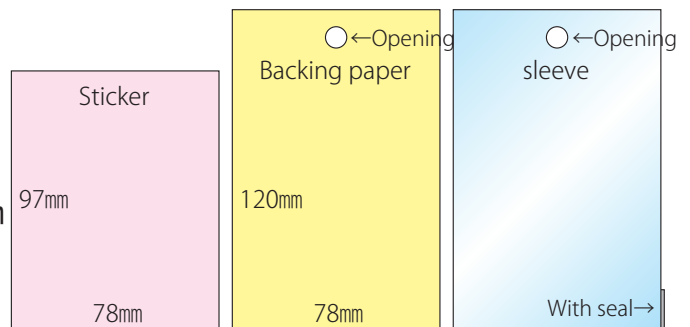


④

- Sticker width of 88mm x height of 120mm
- Backing paper width of 88mm x height of 150mm (with hole/without hole)
- With sleeve with seal (with hole/without hole)

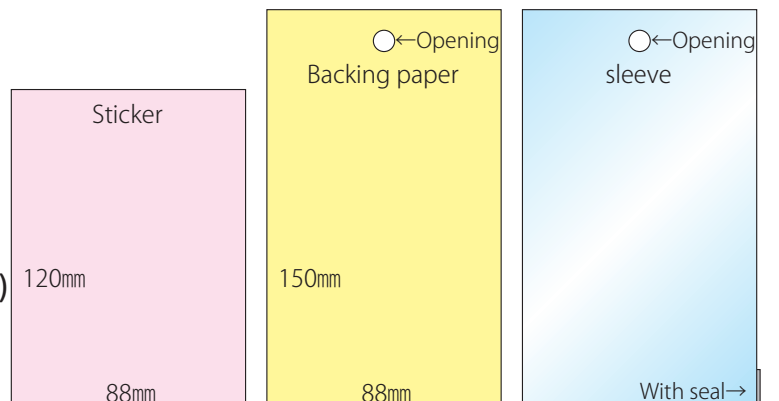


### <How to Create Sticker Data>

Example: Sticker size ② (width of 88mm x height of 55mm)

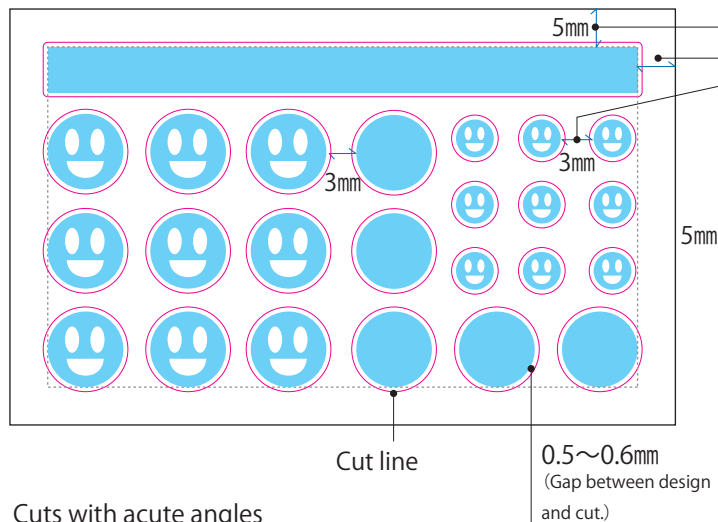


Cuts with acute angles cannot be used.



Cut lines are made with curves.

### Sticker Design

- Leave a gap of 5mm from the edge.
- **Leave a gap of at least 3mm between designs.**
- Specify the portion you would like to make white or transparent in the design.
- **Pictures that are too detailed, thin lines, small text, and the like cannot be reproduced.**  
(The minimum size of a design is 3mm.)
- **Outline the text.**




### Cut Line

- The sticker is cut on its outer side, around 0.5 to 0.6mm from the design's edge.
- The cut line is made at ING KAWAMOTO.
- Cut lines with acute angles cannot be used (see example at left).

### If Placing an Image in Illustrator

- Check the "Place with Link" option.  
*Note: Also send the placed image to us with the data.*
- Resolution of the placed image is 600dpi at actual size.
- Cut out the placed image with a clipping path or make transparent the placed image's background.

**The background portion must be transparent.**



**If placing an image, make transparent the original image's background.**

- Use CMYK or gray scale for the color mode. If created with RGB mode or in double tone, there will be a difference between what you see on your screen and the finished item.

### Data Version


- Compatible with versions up to CC.

### If Making Only with Photoshop

- The resolution must be 600dpi.
- The color mode must be CMYK or gray scale.
- If text is entered in Photoshop, rasterize the text.
- Make transparent the portions that do not have a design on them.

*Note: If using Photoshop data, thin lines might not be clearly output, compared to when using Illustrator data.*

**Make transparent the portions that do not have a design on them.**

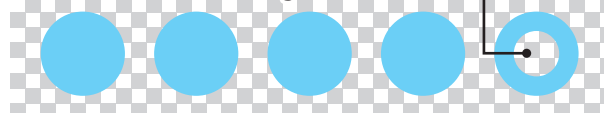

### If Using a Hand-Drawn Pictures


- Scan with a resolution of 600dpi at actual size.
- Use CMYK for the color mode.

*Note: If you send the original picture, scanning can be carried out at ING KAWAMOTO, but a separate fee will be charged. Please check this fee at the time of ordering.*

## Backing Paper Data for OEM Nail Stickers

### 〈How to Create Backing Paper Data〉

Example: Backing paper size ② (width of 88mm × height of 55mm)

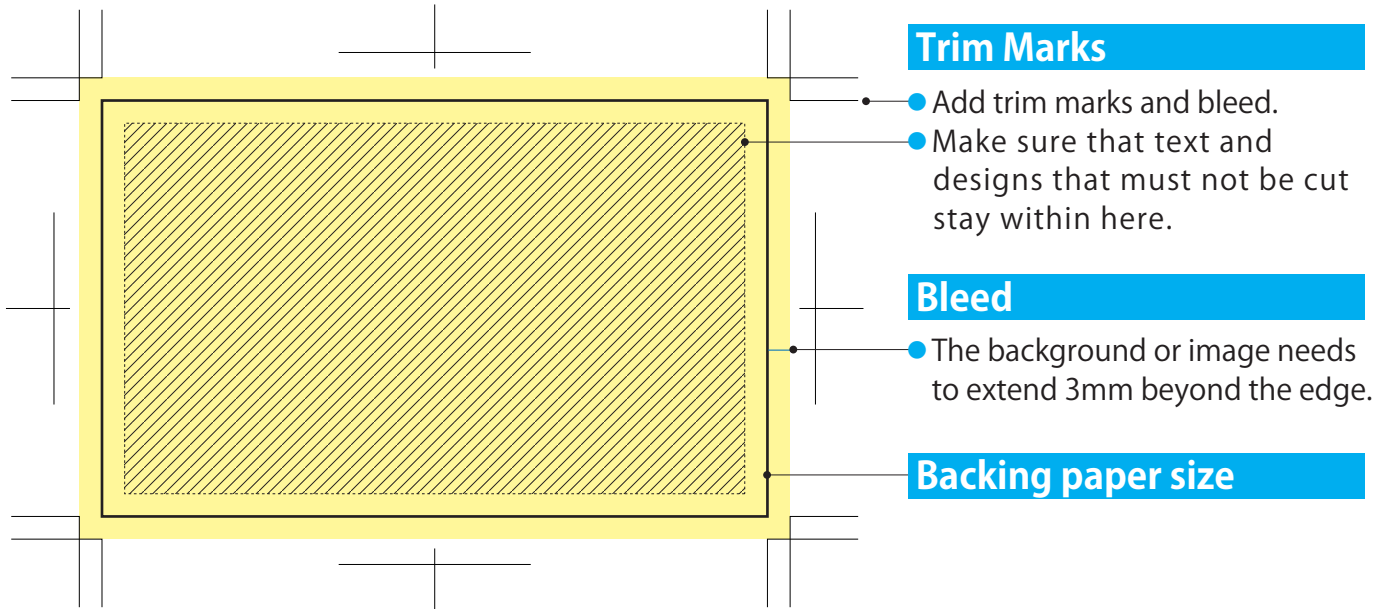

### Illustrator Data

- Check the "Place with Link" option.  
*Note: Also send the placed image to us with the data.*
- Resolution of the placed image is 350dpi at actual size.
- Use CMYK or gray scale for the color mode. If created with RGB mode or in double tone, there will be a difference between what you see on your screen and the finished item.
- Before placing the image, change the mode to CMYK mode in Photoshop.
- **Outline the text.**


### If Making Only with Photoshop

- The resolution must be 600dpi at actual size.
- Use CMYK for the color mode.
- If text is entered in Photoshop, rasterize the text.

### Data Version

- Compatible with versions up to CC.

### Work Flow and Schedule

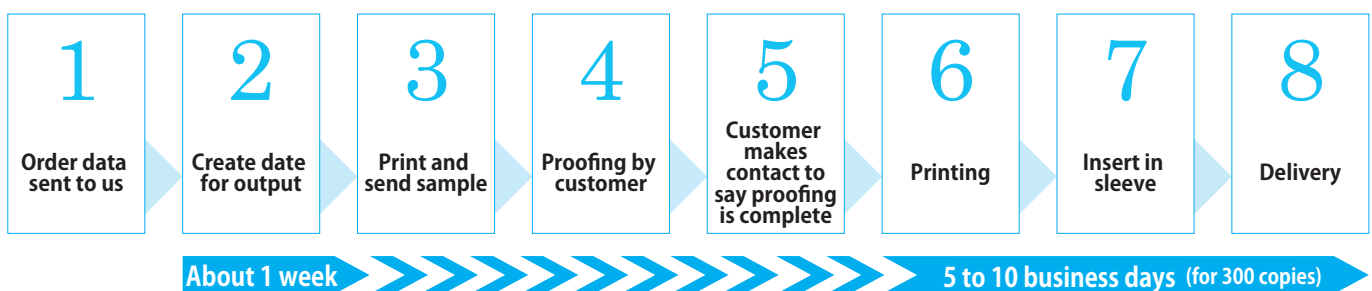

Note: This will differ depending on the number of copies and on how busy we are.